



Sun StorEdge™ D2 Array Cabinet Installation Guide

Sun Microsystems, Inc.
4150 Network Circle
Santa Clara, CA 95054 U.S.A.
650-960-1300

Part No. 816-1696-11
February 2002, Revision A

Send comments about this document to: docfeedback@sun.com

Copyright 2002 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, CA 95054 U.S.A. All rights reserved.

This product or document is distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, AnswerBook2, docs.sun.com, Sun StorEdge, Sun Fire, and Solaris are trademarks, registered trademarks, or service marks of Sun Microsystems, Inc. in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc. The Energy Star logo is a registered trademark of EPA. Adobe is a registered trademark of Adobe Systems, Incorporated.

The OPEN LOOK and Sun™ Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Federal Acquisitions: Commercial Software—Government Users Subject to Standard License Terms and Conditions.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright 2002 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, CA 95054 Etats-Unis. Tous droits réservés.

Ce produit ou document est distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Des parties de ce produit pourront être dérivées des systèmes Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, AnswerBook2, docs.sun.com, Sun StorEdge, Sun Fire, et Solaris sont des marques de fabrique ou des marques déposées, ou marques de service, de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays. Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems, Inc. Adobe est une marque enregistrée de Adobe Systems, Incorporated.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

Achats fédéraux : logiciel commercial - Les utilisateurs gouvernementaux doivent respecter les conditions du contrat de licence standard.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.



Adobe PostScript

Cabinet Installation

This document describes how to mount Sun StorEdge D2 arrays in Sun cabinets. Refer to the following manual how to set up before installation and how to finish installation and configuration after the array is mounted in the cabinet:

- *Sun StorEdge D2 Array Installation, Operation, and Service Manual*

Note – You need a Philips screwdriver to perform the procedures in this manual.

Shipping Box Contents

The shipping box for the cabinet-mountable (also called rack-mountable) Sun StorEdge D2 array contains the following items needed for installing the array in a Sun cabinet.

TABLE 1 Inventory for the Cabinet-mountable Sun StorEdge Array

1	Sun StorEdge D2 array with mounting tray attached
2	Mounting brackets
16	10-32 x 1/2 in screws
2	Trim strips with four 10-14 x 7/16 in screws attached

The shipping box for the conversion kit contains the following items needed for modifying a tabletop array so that the array can be mounted in a Sun cabinet.

TABLE 2 Rackmount Conversion Kit Inventory

1	Mounting tray
2	Mounting brackets
16	10-32 x 1/2 in screws
2	Trim strips with four 10-14 x 7/16 in screws attached
4	10-14 x 7/16 in screws

Overview of Tasks for Mounting Arrays

TABLE 3 lists the tasks required for mounting a Sun StorEdge D2 array in a Sun cabinet along with links to where the tasks are documented.

TABLE 3 Tasks for Mounting Arrays

Task	Where Documented
Find out which mounting holes to use in the cabinet.	<i>Rackmount Placement Matrix (RPM)</i> at www.sun.com/products-n-solutions/hardware/docs/Network_Storage_Solutions/Cabinets_and_Enclosures . For an example using the table for the Sun StorEdge Expansion Cabinet, go to: "Using the Mounting Hole Numbers in the RPM" on page 3.
Install the tray on the array if you are upgrading a tabletop array to rackmount it.	"To Install a Tray on an Array" on page 5
Connect the mounting brackets to the cabinet.	"To Connect the Mounting Brackets to a Cabinet" on page 7
Install the array into the cabinet.	"To Install an Array in a Cabinet" on page 10

Using the Mounting Hole Numbers in the RPM

This section provides the information you need to use the mounting hole numbers provided in the *Rackmount Placement Matrix (RPM)* when you are installing a Sun StorEdge D2 array.

Vertical mounting space is defined in rack units (RUs). Sun StorEdge D2 arrays are 4 RU units high. One RU equals 1.75 in (4.44 cm), which is the total of the distances between the repeating pattern of the mounting holes that make up one RU: .5 in (1.27 cm) + .625 in (1.59 cm) + .625 in (1.59 cm). RU boundaries are in the center of the holes that are spaced .5 in (1.27 cm) apart. The hole spacing for a single RU is illustrated at the lower right of FIGURE 1.

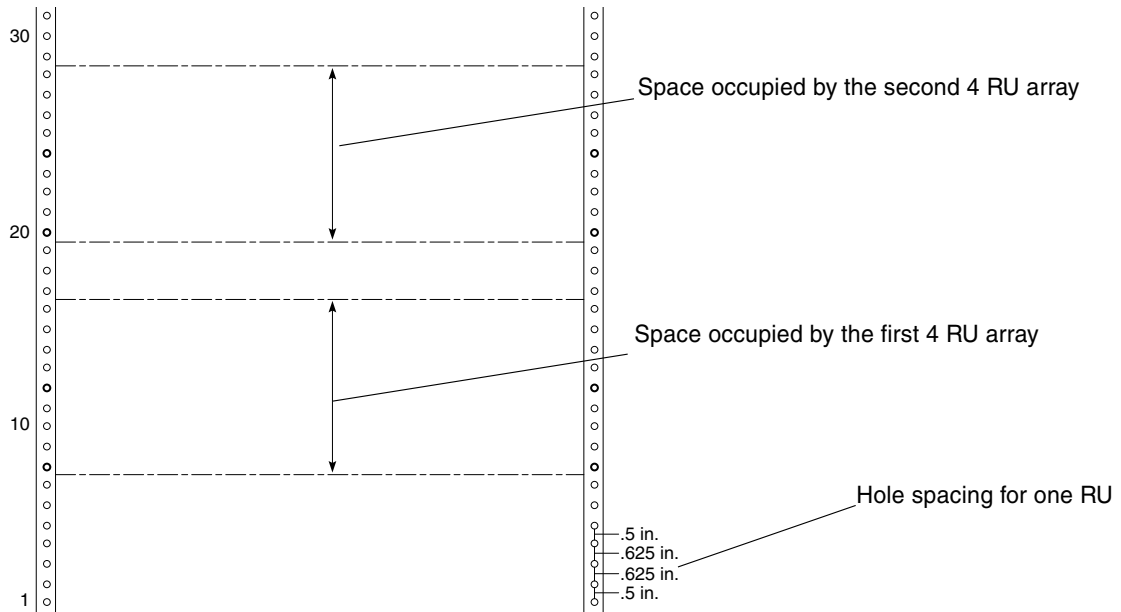


FIGURE 1 Cabinet Hole and RUs, Spacing and Numbering

The hole numbers start with 1 at the bottom and are stamped on the metal in increments of 10 (as illustrated in FIGURE 1). Holes in the metal mounting rails at the front, the back, and the sides of the cabinet all have the same numbers. Also as shown in FIGURE 1, the arrays are installed from the bottom of the cabinet up.

A table in the *RPM* gives the number of RUs in each Sun cabinet. For example, the Sun StorEdge Expansion Cabinet is a 36 RU cabinet, with space for up to nine Sun StorEdge D2 arrays.

TABLE 4 is an example from the *RPM* showing the mounting holes to use when installing Sun StorEdge D2 arrays in a Sun StorEdge Expansion Cabinet. See the *RPM* for other tables that list mounting holes for installing these arrays in other qualified cabinets.

TABLE 4 Holes for Mounting Sun StorEdge D2 Arrays in Sun StorEdge Expansion Cabinets

Array	Mounting Brackets to Cabinet	Tray to Cabinet
1	8,12	11,14
2	20,24	23,26
3	32,36	35,38
4	44,48	47,50
5	56,60	59,62
6	68,72	71,74
7	80,84	83,86
8	92,96	95,98
9	104,108	107,110

The column headings in TABLE 4 are explained in the following list:

- Array

Numbers corresponding to the order of installation of the arrays. Installation proceeds from the bottom of the cabinet up (as indicated in FIGURE 1), with 1 being the first array, 2 being the second, and so on.

- Mounting Brackets to Cabinet

Hole numbers to use when installing the screws that secure the mounting brackets to the cabinet.

For an illustration of the screws that secure the mounting brackets, see “To Connect the Mounting Brackets to a Cabinet” on page 7.

- Tray to Cabinet

Hole numbers to use when installing the screws that secure the tray to the cabinet

For an illustration of the placement of the screws that secure the tray to the cabinet, see FIGURE 7.

The hole numbers from the first row of TABLE 4 are used in examples throughout this manual.

Procedures

▼ To Install a Tray on an Array

Use an 8 in lb torque Philips screwdriver to start the holes. Tighten the screws with an 18 in lb torque driver.



Caution – This procedure requires two people to lift and move the array. Use care to avoid injury. A array with a tray attached may weigh up to 64 pounds (29 kg).

1. With the aid of an assistant, invert the array with the front facing you (FIGURE 2).

2. Remove the feet.

Discard the feet and screws. They are not reused.

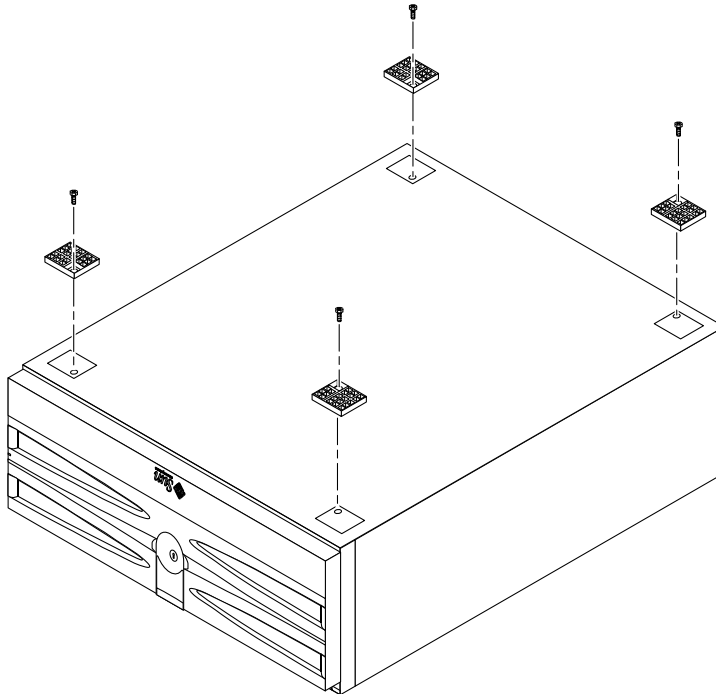


FIGURE 2 Removing the Feet

3. Place the tray on the array (FIGURE 3).

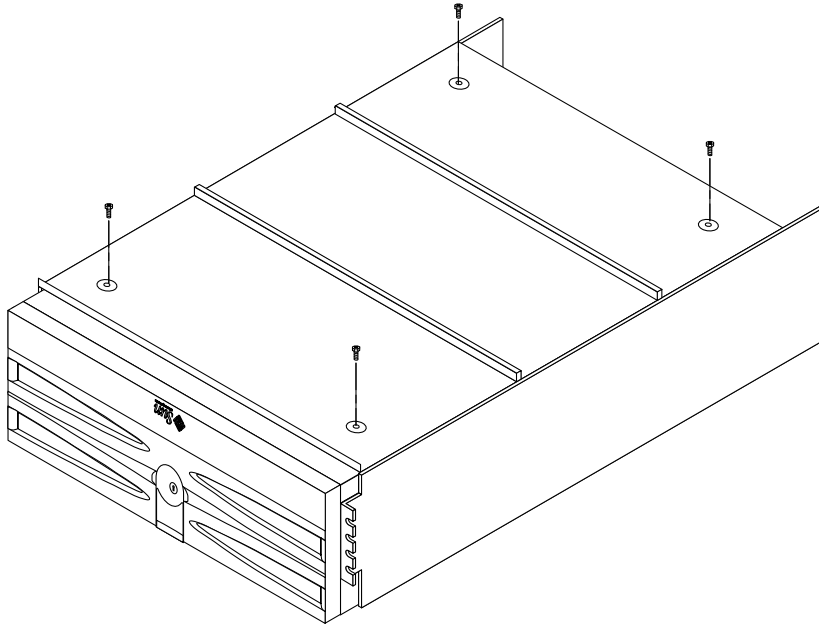


FIGURE 3 Installing the Mounting Tray on the Chassis

4. Loosely thread four 10-14 x 7/16-in screws into the four holes.
5. When all screws are started, tighten them to 18 in/lb.
6. With the aid of an assistant, restore the array to the upright position with the front of the array facing you.
7. Go to “To Connect the Mounting Brackets to a Cabinet” on page 7.

▼ To Connect the Mounting Brackets to a Cabinet

Use an 8 in lb torque Philips screwdriver to start the holes. Tighten the screws with an 18 in lb torque driver.

Have the *Rackmount Placement Matrix* table handy that applies to your cabinet.

Note – The mounting brackets are identical, and they can be installed in either side of the cabinet. Install the brackets from the bottom of the cabinet to the top.

- 1. Remove the front panel or door from the cabinet.**
- 2. Remove the vented rear door from the cabinet.**
Refer to the cabinet’s documentation for how to perform the first two steps.
- 3. Attach the mounting brackets using the designated holes in the brackets and the designated holes in the cabinet’s rails.**

Insert the screws through the designated holes in the brackets shown in FIGURE 4 into the rail holes.

For the appropriate rail hole numbers, see the “Mounting Brackets to Cabinet” column in the table from the RPM that applies your cabinet.

For example, when installing the brackets for the first array in a Sun StorEdge expansion cabinet, you would put the screws into the rail holes numbered 12 and the 8, which are assigned to Array 1 in the following row from TABLE 4.

Array	Mounting Brackets to Cabinet	Tray to Cabinet
1	8,12	11,14

- a. Loosely thread four 10-32 x 1/2 in screws through the bracket into the holes with the same number on the front and back rails on both sides of the cabinet.**

Insert each screw into the highest-numbered hole specified in the “Mounting Brackets to Cabinet” column. When installing the first array in a Sun StorEdge Expansion cabinet, you would insert one screw through the left bracket into hole 12 on the front mounting rail and another screw through the same bracket into hole 12 on the back rail. Then on the right side of the cabinet you would insert two more screws through the right mounting bracket into the corresponding rail holes numbered 12.

- b. Using the top holes designated for your cabinet in FIGURE 4, place the bracket on the screws.

FIGURE 4 shows the top holes to use for Sun Fire cabinets and the top holes to use for other cabinets.

For example, if you are mounting the array in a Sun StorEdge Expansion Cabinet, you would slide the mounting bracket holes designated for “other cabinets” over the screws you attached to the mounting rails in the previous step.

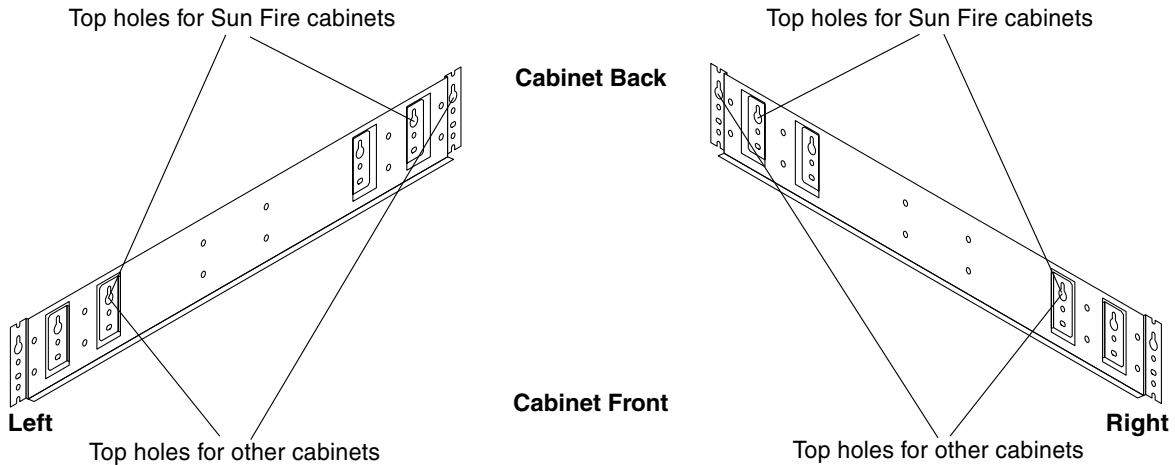


FIGURE 4 Top Holes for Securing the Mounting Bracket to the Cabinet

- i. Take a mounting bracket.
- ii. Place the top holes of the mounting bracket onto the appropriate screws on each side.
- iii. Slide the bracket down so that the tops of the holes rest on the screws.

- Loosely thread four more 10-32 x 1/2 in screws through the appropriate bottom holes of the mounting brackets into the designated holes in the rails.

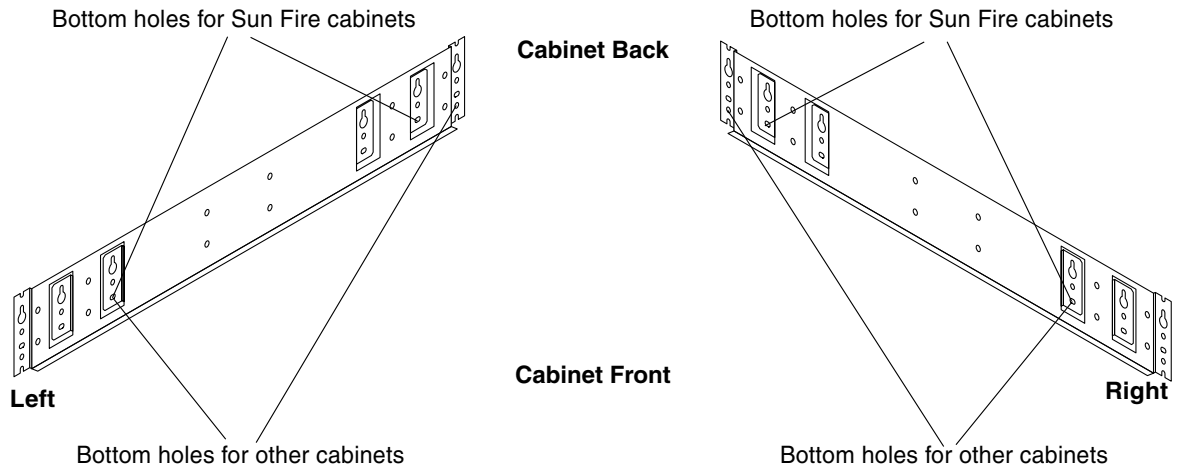


FIGURE 5 Bottom Holes for Securing the Mounting Bracket to the Cabinet

Insert the screws through the mounting bracket according to the placement guidelines in FIGURE 5. Put the screws through the holes in the mounting brackets into the designated numbered holes in the rails (use the smaller number in the “Mounting Brackets to Cabinet” column).

- In the Sun StorEdge expansion cabinet example, you would insert a screw through each mounting bracket on both sides of the cabinet using the bottom holes indicated by “Bottom holes for other cabinets” in FIGURE 5. The screws would connect through the brackets into the holes numbered 8 in the mounting rails.
- Tighten all four screws on both mounting brackets.
- Do Step 3 through Step 6 again for additional brackets for additional arrays, if any.
- Go to “To Install an Array in a Cabinet” on page 10.

▼ To Install an Array in a Cabinet

Use an 8 in lb torque Philips screwdriver to start the holes. Tighten the screws with an 18 in lb torque driver. Install arrays from the bottom of the rack to the top.



Caution – This procedure requires two people to lift and move the array. Use care to avoid injury. A array with a tray attached may weigh up to 64 pounds (29 kg).

1. Unless the cabinet is bolted to the floor, ensure that the cabinet's stabilizer legs are extended before proceeding.



Caution – The cabinet can become front-heavy while the array is being installed. Failure to extend the legs can result in the cabinet tipping forward and injuring personnel.

Refer to the cabinet's documentation for how to extend the stabilizer legs.

2. With the aid of an assistant, lift the array (one person on each side) and approach the cabinet with the back of the array facing the front of the cabinet.
3. Align the mounting tray with the mounting brackets in the cabinet (FIGURE 6).

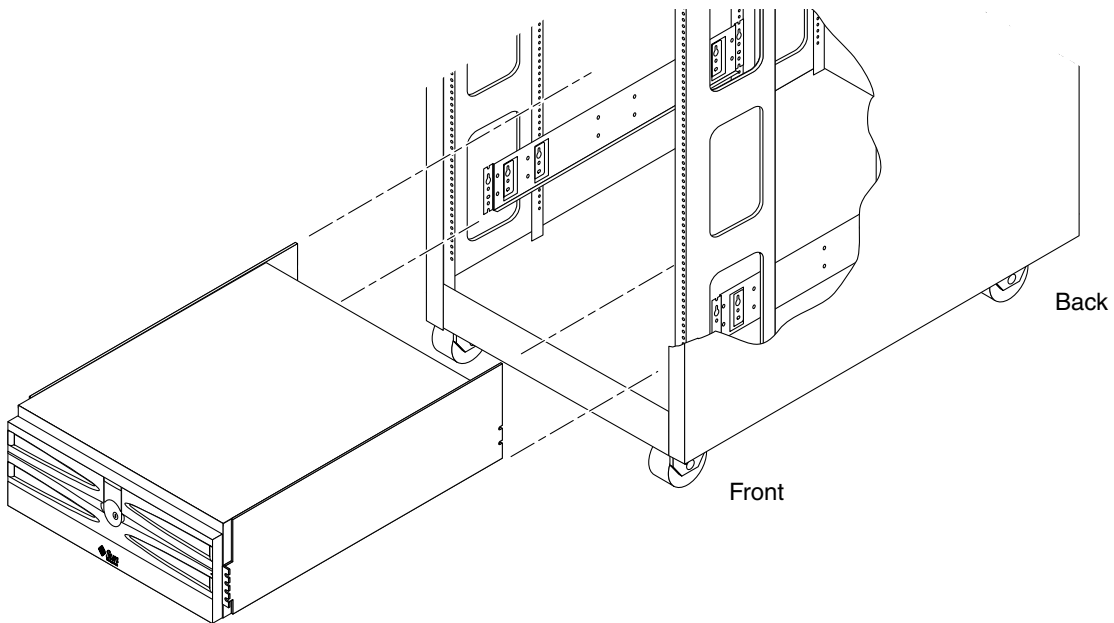


FIGURE 6 Aligning the Mounting Tray With the Mounting Brackets

4. Rest the array on the mounting brackets.
5. Slide the array into the cabinet.
6. Insert and tighten two 10-32 x 1/2 in screws in the designated holes to connect the back of the tray to the rails at the back of the cabinet (FIGURE 7).

For example, when installing the first array into a Sun StorEdge expansion cabinet, you would insert the two screws through the back of the tray into holes 11 and 14 on the rails at the back of the cabinet.

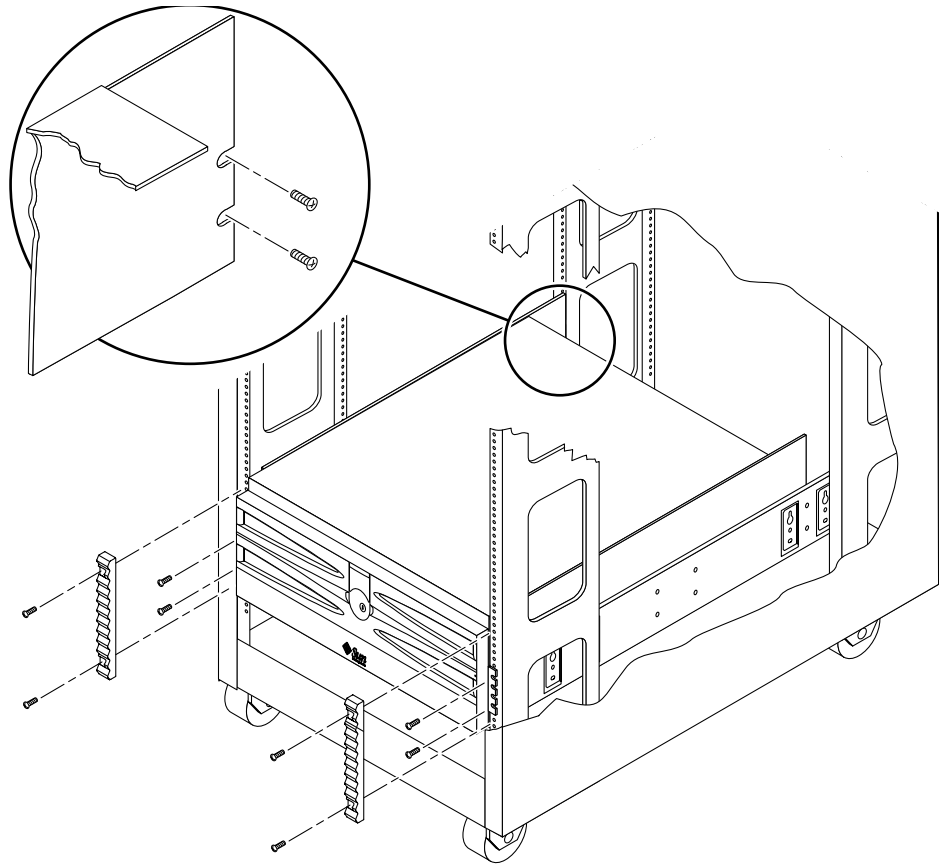


FIGURE 7 Installing the Screws That Connect the Tray and That Connect the Trim Strips to the Cabinet

7. Insert and tighten two 10-32 x 1/2 in screws securing the front of the tray to the mounting rails at the front of the cabinet (FIGURE 7).

For example, when installing the first array into a Sun StorEdge expansion cabinet, you would insert the two screws through the flanges at the front of the tray into holes 11 and 14 on the rails at the front of the cabinet (FIGURE 8).

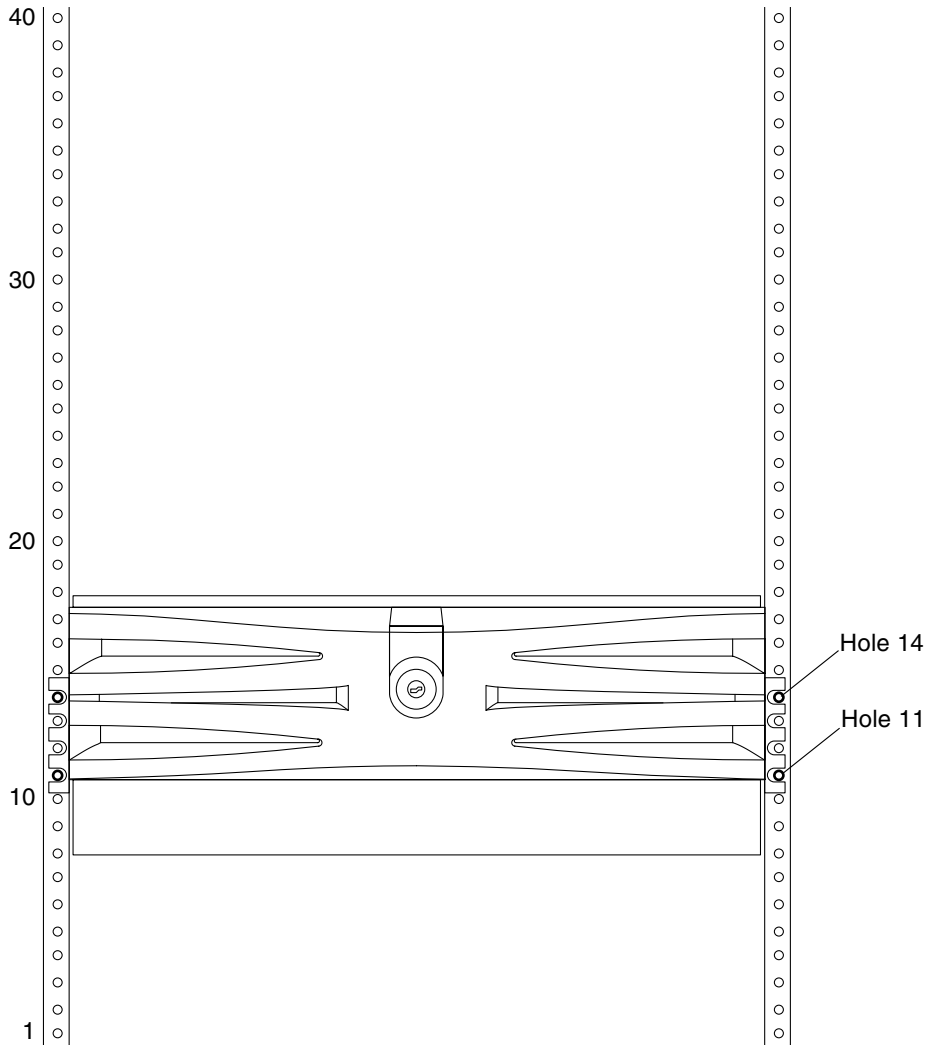


FIGURE 8 Example: Connecting the Front of the First Tray to the Cabinet

8. **Place one trim strip at the right and another trim strip at left side of the front of the array, and insert and tighten the attached screws into the matching holes in the rails at the front (FIGURE 7).**

FIGURE 7 shows the trim strip being applied after the screws connecting the tray to the front of the cabinet.

9. **Repeat Step 2 through Step 8 using the holes specified for next array, until you have installed all the units in the cabinet.**
10. **Follow the instructions in the cabinet documentation, if necessary, to reassemble the cabinet.**

Reassembling the cabinet might include the following steps:

- Replacing or closing the front panel and/or door
- Replacing or closing the vented rear door
- Pushing the stabilizer legs back into the cabinet

11. **Connect the power cable and SCSI cables and perform the additional steps to install and configure the array as described in the installation, operation, and service manual that applies to the array.**

