



# Sun StorEdge™ Traffic Manager 3.1 Software Installation Guide

---

For the Hewlett-Packard HP-UX 11.0 and 11i  
Operating System

Sun Microsystems, Inc.  
[www.sun.com](http://www.sun.com)

Part No. 817-3680-10  
October 2003, Revision A

Send comments about this document to: [docfeedback@sun.com](mailto:docfeedback@sun.com)

Copyright 2003 Sun Microsystems, Inc., 4150 Network Circle Santa Clara, CA 95054 U.S.A. All rights reserved.

This product or document is distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, Solaris, SSTM, and Sun StorEdge are trademarks, registered trademarks, or service marks of Sun Microsystems, Inc. in the U.S. and other countries.

The OPEN LOOK and Sun™ Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Federal Acquisitions: Commercial Software—Government Users Subject to Standard License Terms and Conditions.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

---

Copyright 2003 Sun Microsystems, Inc., 4150 Network Circle Santa Clara, CA 95054 Etats-Unis. Tous droits réservés.

Ce produit ou document est distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Des parties de ce produit pourront être dérivées des systèmes Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, Solaris, SSTM, et Sun StorEdge sont des marques de fabrique ou des marques déposées, ou marques de service, de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.



Please  
Recycle



Adobe PostScript

# Content

---

## **Content i**

### **Preface xi**

Before You Read This Guide xi

How This Guide Is Organized xii

Typographic Conventions xii

Related Documentation xiii

Accessing Sun Documentation Online xiii

Contacting Sun Technical Support xiii

Sun Welcomes Your Comments xiv

## **1. Sun StorEdge Traffic Manager Software Overview 1**

About the Sun StorEdge Traffic Manager Software 1

System Configuration 2

Asymmetric Device Path Management Description 2

Failover 2

Automatic Failover by Error Detection 3

Manual Failover Initiated by the User activate Command 3

Manual Failover Initiated by User restore Command 3

Automatic Failback Initiated by an Automatic Restore 3

Symmetric Device Path Management Description	4
Hub and Switch Configurations	4
<b>2. Installing, Removing, and Starting the Sun StorEdge Traffic Manager</b>	<b>5</b>
Installing the Software on the Hewlett-Packard HP-UX Operating System	5
Preparing to Uninstall the Sun StorEdge Traffic Manager Software	9
Starting the Sun StorEdge Traffic Manager Software	11
Starting the Sun StorEdge Traffic Manager Application Software GUI	11
Starting the Sun StorEdge Traffic Manager Application Software CLI	12
<b>3. Log File Information</b>	<b>13</b>
Accessing the Log Files	13
Accessing the Log Files for the HP-UX Platform	13
Log Level	14
<b>4. Troubleshooting</b>	<b>19</b>
<b>Glossary</b>	<b>21</b>
<b>Index</b>	<b>23</b>

# Figures

---

- FIGURE 1-1 Host Data Paths Between HBAs and the Storage Devices 2
- FIGURE 2-1 Driver Installation Screen for HP-UX 7
- FIGURE 2-2 Software Removal Window for HP-UX 10



# Tables

---

TABLE 4-1	Troubleshooting Tips for the HP-UX Operating system	19
-----------	---	----





# Preface

---

The *Sun StorEdge Traffic Manager 3.1 Software Installation Guide - HP-UX for the Hewlett-Packard HP-UX 11.0 and 11i Operating Systems* provides instructions for installing the Sun StorEdge™ Traffic Manager software on the host system.

This guide is designed for use with Sun™ storage devices and is written for experienced system administrators of the HP-UX operating environment and related disk storage systems.

Throughout this guide, *storage device* is used to designate the storage devices supported in this release. The supported devices are:

- Sun StorEdge 6020 array with 2.1x Firmware Asymmetric Explicit LUN Failover (ELF)
- Sun StorEdge 39xx Asymmetric ELF
- Sun StorEdge 6910 and 6960 Symmetric
- Sun StorEdge 6120 array Asymmetric ELF
- Sun StorEdge 6320 System Asymmetric ELP
- Sun StorEdge 3510 FC array Symmetric
- Sun StorEdge 99xx Symmetric only

---

## Before You Read This Guide

Read the documentation that came with your storage device and have an experienced system administrator's knowledge of the supported Hewlett Packard operating environment in which you are installing the Sun StorEdge Traffic Manager software.

---

## How This Guide Is Organized

This guide is organized as follows:

Chapter 1 provides an overview of the Sun StorEdge Traffic Manager software .

Chapter 2 describes how to install and uninstall the software for the driver.

Chapter 3 contains information about accessing the log files and explains the information contained in them.

Chapter 4 provides troubleshooting information.

Glossary contains a list of words and phrases and their definitions.

---

## Typographic Conventions

Typeface	Meaning	Examples
AaBbCc123	The names of commands, files, and directories; on-screen computer output	Edit your <code>.login</code> file. Use <code>ls -a</code> to list all files. % You have mail.
<b>AaBbCc123</b>	What you type, when contrasted with on-screen computer output	% <b>su</b> Password:
<i>AaBbCc123</i>	Book titles, new words or terms, words to be emphasized	Read Chapter 6 in the <i>User's Guide</i> . These are called <i>class</i> options. You <i>must</i> be superuser to do this.
	Command-line variable; replace with a real name or value	To delete a file, type <code>rm filename</code> .

---

## Related Documentation

Application	Title	Part Number
Late-breaking information	<i>Sun StorEdge Traffic Manager 3.1 Software Release Notes for IBM AIX, Hewlett-Packard HP-UX, and Microsoft Windows NT, 2000, and 2003 Operating Systems</i>	817-4687-10
Using	<i>Sun StorEdge Traffic Manager 3.1 Software User's Guide</i>	817-3678-10
SAN Configuration	<i>Sun StorEdge SAN Foundation Configuration Guide</i>	817-0057-10

---

## Accessing Sun Documentation Online

You can view, print, or purchase a broad selection of Sun documentation, including localized versions, at:

<http://www.sun.com/documentation>

---

## Contacting Sun Technical Support

If you have technical questions about this product that are not answered in this document, go to:

<http://www.sun.com/service/contacting>

---

## Sun Welcomes Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions. You can submit your comments by going to:

<http://www.sun.com/hwdocs/feedback>

Please include the title and part number of your document with your feedback:

*Sun StorEdge Traffic Manager 3.1 Software Installation Guide for the Hewlett-Packard HP-UX 11.0 and 11i Operating Systems*, part number 817-3680-10.

# Sun StorEdge Traffic Manager Software Overview

---

This chapter contains the following topics:

- “About the Sun StorEdge Traffic Manager Software” on page 1
- “Hub and Switch Configurations” on page 4

---

## About the Sun StorEdge Traffic Manager Software

The Sun StorEdge Traffic Manager is a system for managing multiple paths to storage devices. The Sun StorEdge Traffic Manager software is comprised of a graphical user interface (GUI) application, a command line interface application (CLI), and system device drivers that enable you to manage the multiple paths. If a failure occurs in one host data path, the Sun StorEdge Traffic Manager software automatically detects the failure, reroutes the data, and balances the I/O across active paths.

Refer to Chapter 2 of this guide for information about starting the software and *Sun StorEdge Traffic Manager 3.1 Software User's Guide* for a description of using the GUI and CLI interfaces. From the GUI, the User's Guide can be accessed by clicking on HELP -> User's Guide. From the CLI, the User's Guide.pdf can be accessed directly from the `/opt/SunTrafficManager/docs` subdirectory using Adobe Acrobat Reader.

## System Configuration

The Sun StorEdge Traffic Manager system maintains and presents storage system configuration information. FIGURE 1-1 shows an example of using the Sun StorEdge Traffic Manager GUI application to access the Sun StorEdge Traffic Manager system.

In FIGURE 1-1, each storage device and the LUNs associated with it are shown on the left side of the screen and the paths and host bus adapters (HBA) system names are shown on the right.

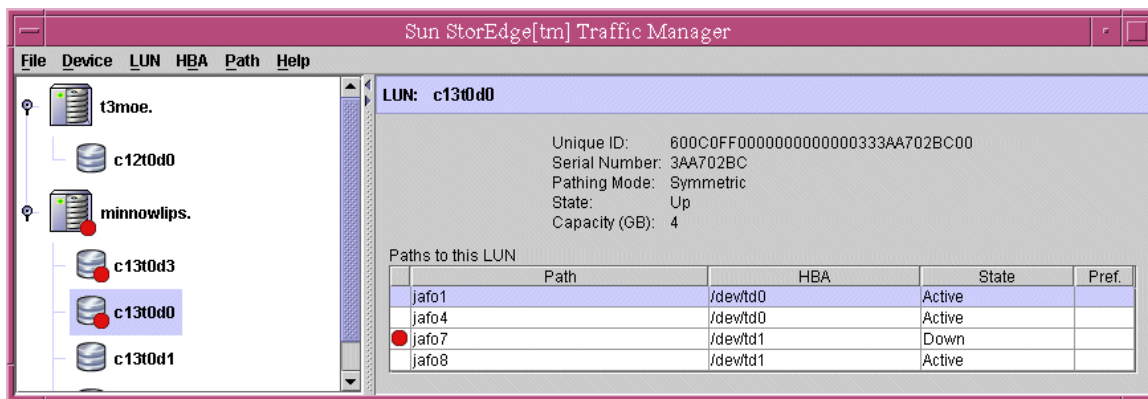


FIGURE 1-1 Host Data Paths Between HBAs and the Storage Devices

## Asymmetric Device Path Management Description

For Asymmetric devices, the following description of failover and failback operations apply.

### Failover

A LUN on a asymmetric device can only have one active controller at a time. The remaining controller is known as the passive controller. Paths to the active controller are known as active paths. Paths to the passive controller are known as passive paths. The process by which a LUN may force a passive controller to become its active controller is known as LUN failover. Upon successful LUN failover, passive paths to a controller become active and previous active paths become passive. On the Sun StorEdge 6020, Sun StorEdge 39xx, and Sun StorEdge 6120 arrays, failover is implemented per device volume. Therefore, if volume slicing is enabled, there may

be multiple LUNs on the volume affected by a failover. Also in a multi-initiator environment, a LUN failover on one host is detected by all other hosts using LUNs on the same volume.

LUN failover can be initiated by both automatic and manual means.

## Automatic Failover by Error Detection

If a path receives errors and fails, it is marked as Down or Removed. If all the active paths for a LUN are marked down and there are remaining passive paths, the driver automatically causes a LUN failover to activate the passive paths.

## Manual Failover Initiated by the User *activate* Command

The user may use the *activate* command to manually initiate a LUN failover by activating a passive path. Previously active paths will become passive. If the LUN is a slice on a volume, all LUNs on that volume will failover for all hosts.

## Manual Failover Initiated by User *restore* Command

On some devices, a LUN may have a default active controller. This is known as the preferred controller. A *restore* command will attempt to cause a failover of all LUNs that do not currently have active paths to their preferred controller.

## Automatic Failback Initiated by an Automatic Restore

If the driver recognizes that a down path becomes passive, an automatic *restore* command may occur. This is currently known as autofailback. The autofailback parameter must be set to *enabled* in order for this to occur.

---

**Note** – Autofailback is not supported in a multi-initiator environment.

---

To learn how to perform failback, see the *Sun StorEdge Traffic Manager 3.1 User's Guide*. From the GUI, the User's Guide can be accessed by clicking on HELP -> User's Guide. From the CLI, the User's Guide.pdf can be accessed directly from the `/opt/SunTrafficManager/docs` subdirectory using Adobe Acrobat Reader.

## Symmetric Device Path Management Description

For symmetric devices, all paths are active unless a path is unhealthy and in which case, it is down. There is no failover or failback, an unhealthy path is just not used. Load balancing occurs across all active paths to improve performance by using all available paths to a storage device.

---

## Hub and Switch Configurations

The Sun StorEdge Traffic Manager software also works with storage device configurations that include hubs and switches. For a list of compatible hubs, see the URL in “Preparing for Installation” on page 6.

For information about configuring a storage device with switches, refer to the documentation for the switch you are using.

---

**Note** – Do not configure switches with a Domain ID of 8. Hewlett-Packard HP-UX systems reserve Domain 8 for private loop devices.

---



## Installing, Removing, and Starting the Sun StorEdge Traffic Manager

---

This chapter contains the following topics:

- “Preparing for Installation” on page 6
- “Installing the Software on the Hewlett-Packard HP-UX Operating System” on page 5
- “Preparing to Uninstall the Sun StorEdge Traffic Manager Software” on page 9
- “Starting the Sun StorEdge Traffic Manager Software” on page 11
- “Starting the Sun StorEdge Traffic Manager Software” on page 11

---

### Installing the Software on the Hewlett-Packard HP-UX Operating System

The installation file for HP-UX is named `SunTrafficMgrx.x.x_y.y.depot` (where `x.x.x` is the build number and `y.y` is the operating system version).

- `SunTrafficMgr3.1.6_11.11.depot` is the installation file for HP-UX version 11i
- `SunTrafficMgr3.1.6_11.00.depot` is the installation file for HP-UX version 11.0

You can install the driver with the `swinstall` command-line interface or with the GUI. The following steps use the GUI.

---

**Note** – If you have installed a previous version of the driver, you must uninstall it before installing the new version. See “Preparing to Uninstall the Sun StorEdge Traffic Manager Software” on page 9.

---

## ▼ Preparing for Installation

1. **Open a terminal window and become `superuser`.**
2. **Build a text file named `SunTrafficManagerSN.txt` and put the correct serial number of the software in the text file.**

The serial number is found on the License Card that you received with the Sun StorEdge Traffic Manager software CD.

---

**Note** – The `SunTrafficManagerSN.txt` file must contain only the serial number. There cannot be carriage returns or any other characters.

---

3. **Save the `SunTrafficManagerSN.txt` file at location `/etc/SunTrafficManagerSN.txt`.**

The software installation will fail if it does not find the `SunTrafficManagerSN.txt` file.

4. **Before you install the driver, make sure you have the correct versions of the hardware and software.**

For the most up-to-date information, see:

[http://www.sun.com/storage/san/multiplatform\\_support.html](http://www.sun.com/storage/san/multiplatform_support.html)

## ▼ Mounting the CD

1. **If a mount point is not defined, one must be defined.**

For example:

```
# mkdir /cdrom
```

2. **If necessary, identify the drive device file:**

For example:

```
# ioscan -fnC disk
```

This step lists all recognizable CD drives and their device files. An example of the information returned is;

```
# /dev/dsk/c1t2d0
```

### 3. Mount the CD drive on the mount point.

For example:

```
# mount -r /dev/dsk/c1t2d0 /cdrom
```

Now the CD can be accessed through the mount point. For example:

```
# ls /cdrom
```

## ▼ Preparing the Host For the Installation

### 1. Start the software installation utility:

```
# swinstall
```

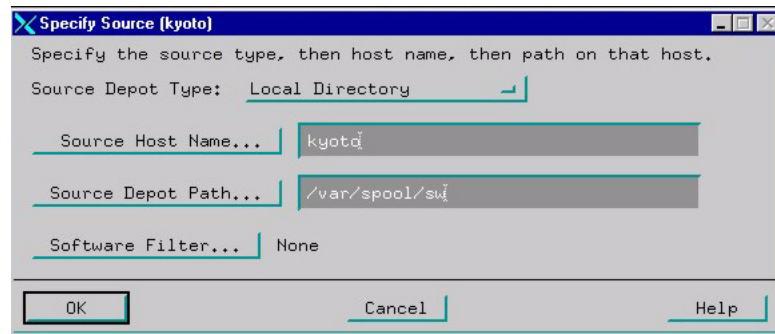


FIGURE 2-1 Driver Installation Screen for HP-UX

### 2. Ensure that the Source Depot Type selection points to the depot files. For example, Local CDROM.

### 3. Type the host system name in the Source Host Name field.

The field might be filled in automatically.

4. **Type the full path to the location of the installation file in the Source Depot Path field.**

For example:

```
/cdrom/SunTrafficMgr3.1.6_11.11.depot
```

You must include the name of the installation file in the path.

5. **Click OK.**
6. **Select the driver name** SunTrafficManage.  
Due to character limit, the driver name is shown as “SunTrafficManage” without the final r.
7. **Choose Actions -> Mark for Install.**
8. **Choose Actions -> Install (analysis).**
9. **When the analysis is complete, click Log file to see the results of the analysis and whether there will be any problems with the installation.**  
If there are problems with the analysis, you must resolve them before you can install the driver. Refer to your operating system documentation.
10. **Click OK to exit the log file.**

## ▼ Completing the Installation of the Sun StorEdge Traffic Manager Software

1. **If there are no problems with the analysis, click OK on the Software Installation Screen to begin the installation.**  
The system tells you that the kernel will be rebuilt and that you must reboot the computer after installation.  
The system confirms that you want to proceed.
2. **Click Yes.**  
The status changes to Ready and the Done button becomes active when the installation is complete.
3. **Click Done.**  
The system notifies you that the computer will now be rebooted. You must reboot the computer before you can use the driver.
4. **Click OK.**

## ▼ Verifying the Installation

- Use the `swlist` command to verify the installation as shown in the following example:

```
> swlist SunTrafficManager
# Initializing ...
# Contacting target "hp2"...
#
# target: hp2:/
```

If the driver is installed properly, a response similar to the following is displayed:

```
# SunTrafficManager          A.3.1.0.5      SunTrafficManager Multi-Path Driver
SunTrafficManager.docs      3.1.0.5       Sun Documentation
SunTrafficManager.driver    3.1.0.5       SunTrafficManager Driver
SunTrafficManager.gui       3.1.0.5       SunTrafficManager GUI
SunTrafficManager.utilities 3.1.0.5       SunTrafficManager utilities
root@hp2:/
```

---

## Preparing to Uninstall the Sun StorEdge Traffic Manager Software

Before you uninstall the driver:

- Make sure that the operating system is not accessing the storage device.
- Unmount the file system on each storage device array.
- Take the volume group offline from each storage device array.

Refer to your operating system documentation for more information about these functions.



---

**Caution** – Do not use the arrays in a partner group configuration with two HBAs without the driver installed. Uninstalling the driver causes the operating system to see two paths to each LUN, which can result in data corruption.

---

Uninstall the driver the same way you uninstall most HP-UX software. Use either the GUI or command-line version of `swremove` to uninstall the driver. The steps that follow use the GUI version.

## ▼ Uninstalling the Sun StorEdge Traffic Manager Software

### 1. Start the software removal utility.

```
# swremove
```

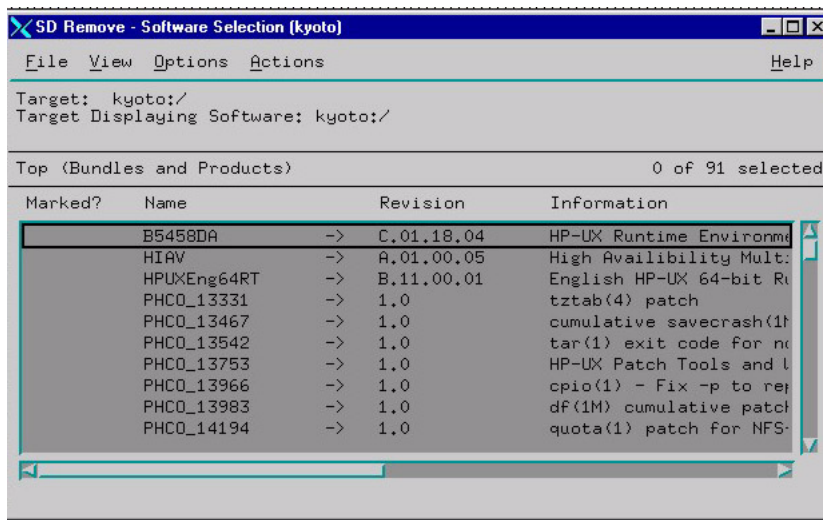


FIGURE 2-2 Software Removal Window for HP-UX

2. Select the line that starts with `SunTrafficManager`.
3. Run an analysis to ensure that the host is ready for software removal.
  - a. Choose **Actions -> Mark for Remove**.
  - b. Choose **Actions -> Remove (analysis)**.
  - c. When the analysis is complete, click **Log file** to see the results of the analysis and whether there will be any problems with uninstalling the driver.

If there are problems with the analysis, you must resolve them before you can uninstall the driver. Refer to your operating system documentation.
4. Click **OK** to exit the log file.

**5. If there are no problems with the analysis, click OK.**

The system tells you that the kernel will be rebuilt and that you must reboot the computer after uninstallation.

The system confirms that you want to proceed.

**6. Click Yes.**

The Done button becomes active when the removal is complete.

**7. Click Done.**

The system notifies you that the computer will now be rebooted. You must reboot the computer.

**8. Click OK.**

The software removal is complete after the reboot.

---

## Starting the Sun StorEdge Traffic Manager Software

This section describes how to start the Sun StorEdge Traffic Manager. It contains the topic:

- “Starting the Sun StorEdge Traffic Manager Application Software GUI” on page 11
- “Starting the Sun StorEdge Traffic Manager Application Software CLI” on page 12

## Starting the Sun StorEdge Traffic Manager Application Software GUI

To start the Sun StorEdge Traffic Manager application software GUI in HP-UX, type the following:

```
trafficmgr
```

The Sun StorEdge Traffic Manager software window is displayed.

The Sun StorEdge Traffic Manager multipathing driver is started automatically at system boot or when supported devices are recognized.

To learn more about using the Sun StorEdge Traffic Manager application software, click Help on the Sun StorEdge Traffic Manager window and select User's Guide from the pull-down menu. The User's Guide is a PDF file accessed by Adobe Acrobat Reader.

## Starting the Sun StorEdge Traffic Manager Application Software CLI

Entering the `sstm` command with any option on the command line starts the Sun StorEdge Traffic Manager application software CLI if you are in the `sstm` folder or the `sstm` folder is in your path.

The Sun StorEdge Traffic Manager multipathing driver is started automatically at system boot or when supported devices are recognized.

To learn more about the Sun StorEdge Traffic Manager software, use Adobe Acrobat Reader to open the User's Guide.PDF file found at `/opt/SunTrafficManager/docs`.



## Log File Information

---

This chapter describes the log files for the HP-UX operating environment and the log levels logged in the system log file. See the Sun StorEdge Traffic Manager 3.1 User's Guide for a description of setting the log levels.

Topics in this section include:

- "Accessing the Log Files" on page 13
- "Log Level" on page 14

---

## Accessing the Log Files

### Accessing the Log Files for the HP-UX Platform

The log files are contained in the following file:

```
/var/adm/syslog/syslog.log
```

Use a text editor to look through this file.

---

## Log Level

This section describes the various log messages at the various logging levels as configured by the GUI or CLI. See the Sun StorEdge Traffic Manager 3.1 Software User's Guide for a description of setting the logging level for all devices attached to the current host. The Sun StorEdge Traffic Manager 3.1 Software User's Guide is displayed by selecting `Help` from the Sun StorEdge Traffic Manager window and selecting `User's Guide` from the drop down list.

You can configure the following logging levels:

- Informational messages - these include all critical error messages as well as non-critical alerts. Non-critical alerts are usually when something has changed but no functionality is lost.
- Data path change messages - changes to the state of a host data path.
- Critical error messages - Unrecoverable errors, such as when the Sun StorEdge Traffic Manager software loses access to a LUN or is out of memory.
- Caution and internal error messages - Errors the Sun StorEdge Traffic Manager software encounters but does not handle.

If logging level `Data Path Changes` is not set, data path change messages are not shown.

If logging levels `Data Path Changes` and `Critical Error` messages are set, only critical information is shown.

If logging levels `Data Path Changes` and `Internal Errors` are set, only non-critical information is shown.

TABLE 3-1 Log Informational

Message	Message Explanation	Information in the Message
Driver loaded.	The operating system has loaded the Sun StorEdge Traffic Manager software.	<ul style="list-style-type: none"><li>• Major version</li><li>• Minor version</li><li>• Point version</li><li>• Release version</li></ul>

**TABLE 3-2** Log Data Path Changes and Log Critical Errors

Message	Message Explanation	Information in the Message
Path state change.	This message is logged when the state of any path changes for critical reasons.	<ol style="list-style-type: none"> <li>1. Old state and new state. Valid values are: <ul style="list-style-type: none"> <li>• Active</li> <li>• Passive</li> <li>• Down</li> </ul> </li> <li>2. Path name</li> <li>3. Unique LUN ID</li> <li>4. Reason string, valid values are: <ul style="list-style-type: none"> <li>• I/O status—state change as a result of I/O status. There will also be detail data consisting of operating system specific SCSI status.</li> <li>• User initiated—state change as a result of user initiated action, for example, activate or disable</li> <li>• AutoFailback initiated—state change as a result of auto failback action</li> <li>• Failover initiated—state change due to the need for passive to active action</li> </ul> </li> </ol>

**TABLE 3-3** Log Critical Messages

Message	Message Explanation	Information in the Message
Failover comand sent to:	This message is logged when the state of any path changes for critical reasons and the logging levels Log Data Path Changes is set in addition to Log Critical Error.	<ol style="list-style-type: none"> <li>1. Path name on which the failover command was sent</li> <li>2. Unique LUN ID</li> <li>3. Unique array ID</li> <li>4. Controller ID</li> <li>5. Reason string, valid values are: <ul style="list-style-type: none"> <li>• User initiated—failover command sent as a result of user initiated action. For example, activate or disable.</li> <li>• AutoFailBack initiated—failover command sent as a result of auto restore failback action</li> <li>• Failover initiated—failover command sent due to the need for passive to active action</li> </ul> </li> </ol>

**TABLE 3-4** Log Data Path Changes and Log Internal Errors

Message	Message Explanation	Information in the Message
Path state changed to:	This message is logged when the state of any path changes for critical or non-critical reasons and the logging levels Log Data Path Changes and Log Internal Errors are set.	<ol style="list-style-type: none"> <li>1. Old state and new state. Valid values are: <ul style="list-style-type: none"> <li>• Unknown</li> <li>• Active</li> <li>• Passive</li> <li>• Transition</li> <li>• Down</li> <li>• Admin</li> <li>• Removed</li> </ul> </li> <li>2. Path name</li> <li>3. Unique LUN ID</li> <li>4. Reason string, valid values are: <ul style="list-style-type: none"> <li>• IO status—state change as a result of I/O status. There will also be detail data consisting of operating system specific SCSI status.</li> <li>• Device added—state change as a result of a new path</li> <li>• Device removed—state change as a result of a path removed</li> <li>• User initiated—state change as a result of a user initiated action. For example, activate or disable.</li> <li>• AutoFailBack initiated—state change as a result of auto failback action</li> <li>• Failover initiated—state change due to a need for passive to active action</li> </ul> </li> </ol>

**TABLE 3-5** Log Internal Messages

Message	Message Explanation	Information in the Message
LUN state changed.	This message is logged when any noncritical LUN state changes occur.	<ol style="list-style-type: none"> <li>1. Old LUN state and new LUN state. Valid values are: <ul style="list-style-type: none"> <li>• Unknown</li> <li>• Up</li> <li>• Transition</li> <li>• Down_Grace</li> <li>• Down</li> <li>• Removed</li> </ul> </li> <li>2. LUN unique ID</li> </ol>





# Troubleshooting

---

TABLE 4-1 provides HP-UX operating system troubleshooting information.

**TABLE 4-1** Troubleshooting Tips for the HP-UX Operating system

<b>Problem</b>	<b>Solution</b>
The physical connection between the host and arrays is correct, but the host still does not see the array devices.	Check the <code>syslog</code> . Look for messages logged by the driver named <code>Jaf0</code> .
You used to see all the existing LUNs on both arrays in a partner pair over a single active path. Now you see two active paths for each array and each array's LUNs are only visible on its own path. You no longer see all the LUNs on a single path.	Set the <code>mp_support</code> parameter from <code>none</code> to <code>mpxio</code> . At the Telnet interface to the array, type: <code>sys mp_support mpxio</code> for Sun StorEdge 3900, 6900, and 6320 Series storage systems.





# Glossary

---

<b>active path</b>	A path that is healthy and ready for I/O.
<b>array</b>	A Sun StorEdge array that contains an internal RAID controller and disk drives with Fibre Channel connectivity to the data host.
<b>failback</b>	The process of making a LUN's preferred controller the active controller. Also known as restore.
<b>failover</b>	The process of sending a failover command down a passive path to change the active controller for a LUN.
<b>host bus adapter (HBA)</b>	A controller board that connects the host computer bus and the FC-AL that manages the transfer of information between the two channels.
<b>logical unit number (LUN)</b>	A piece of logical storage presented by the device to the host.
<b>passive path</b>	For an asymmetric device, a path to a passive controller. Can be made active by sending a failover command.
<b>preferred controller</b>	On an asymmetric device, the default active controller for a LUN.
<b>restore</b>	The process of making a LUN's preferred controller the active controller. Also known as failback.
<b>volume</b>	One or more drives configured into a RAID group. May be sliced into smaller LUNs to be presented to the host.
<b>worldwide name (WWN)</b>	Unique number assigned to each device on a Fibre Channel loop.



# Index

---

## A

- activate command, initiating a manual failover, 3
- asymmetric devices
  - path management description, 2
- asymmetric devices, failback, 3
- automatic failover by error detection, 3
- automatic failover, initiated by automatic restore command, 3
- automatic restore, initiating an automatic failover, 3

## C

- CLI, starting, 12
- conventions, typographic, xii

## D

- description of failover, 2
- documentation, related, xiii

## E

- error detection, causing automatic failover, 3

## F

- failback, asymmetric devices, 3

## failover

- automatic by error detection, 3
- automatic initiated by automatic restore, 3
- description, 2
- manual failover initiated by restore command, 3
- manual, initiated by user command, 3
- symmetric device description, 4

## G

- general description, Sun StorEdge Traffic Manager software, 1
- graphical user interface (GUI) use example, 2
- GUI, starting, 11

## H

- Hewlett-Packard operating system installation file versions, 5
- host, preparing for installation, 7
- hub configurations, 4

## I

- installation CD, mounting, 6
- installation preparation procedure, 6
- installation Sun StorEdge Traffic Manager software preparation procedure, 6
- installation verification, 9
- installing

- a new version, 5
- installing Sun StorEdge Traffic Manager software
  - host preparation., 7
  - mounting the installation CD procedure, 6

## L

- log file information, accessing, 13
- log file information, pointer to description, 13
- log file, log levels, description of, 14
- log level
  - caution and internal error messages, 14
  - critical error messages, 14
  - data path change messages, 14
- log levels
  - informational messages, 14

## M

- manual failover, initiated by activate command, 3
- manual failover, initiated by restore command, 3

## N

- new version, installing, 5

## O

- operating system versions, Hewlett-Packard
  - installation files, 5

## P

- path management
  - asymmetric devices, 2

## R

- related documentation, xiii
- restore command, initiating a manual failover, 3

## S

- software installation utility, swinstall, 7
- Sun StorEdge Traffic Manager software
  - general description, 1
  - GUI application example, 2
  - installing the software procedure, 8
  - preparing to uninstall the software, 9
  - starting CLI, 11
  - starting GUI, 11
  - system configuration, 2
  - uninstalling the driver, 9
  - uninstalling, using the software removal utility, 10
  - verifying the installation, 9
- swinstall, software installation utility, procedure, 7
- switch configuration, 4
- switch Domain ID 8 note, 4
- swlist command, verifying the installation, 9
- swremove utility, uninstalling the software, 10
- symmetric device
  - fallback description, 4
  - failover description, 4

## T

- typographic conventions, xii

## U

- uninstalling the software driver, 9